+ RING OUT THE OLD +

Bring in the New

ZWICKY

Mobile Refuelling Units

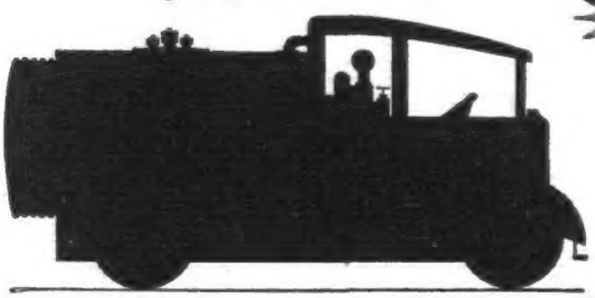

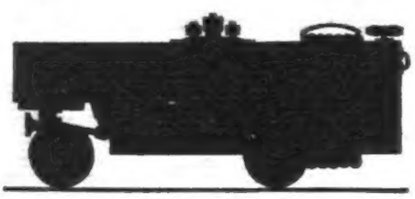

ZWICKY LTD.
SLOUGH • BUCKS

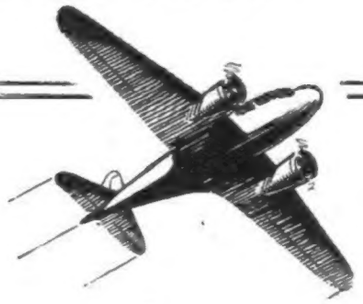

UNITS THAT SAVE

TIME

THE VITAL FACTOR IN CIVIL OR SERVICE AVIATION

3 Boom unit for simultaneous refuelling of three machines. Pump driven by main engine and hand gear fitted. Capacities 350 to 1,000 gallons. Pumping rate up to 100 gallons per minute.

Trailer unit for towing. Pump driven by independent engine ; hand gear fitted. Two or more discharge points. Capacities 450 to 1,000 gallons. Pumping rate up to 100 gallons per minute.

Light motor type. Pump driven by main engine. One or more discharge points. Capacities 350 to 500 gallons. Pumping rate up to 60 gallons per minute.

Hand operated 3 wheeler mobile type. Pump hand operated. Capacities from 100 to 300 gallons. Pumping rate up to 40 gallons per minute.